SkyMate® m1600

EMAIL/SMS
STAY CONNECTED
- Send and receive emails/SMS from any location
- Small attachments available

ELECTRONIC FORMS
SEND/RECEIVE FORMS ANYTIME
- Transmit forms to shore
- Increase the efficiency of billing and information flow

WEATHER ON DEMAND
UP-TO-DATE WEATHER FORECASTS
- Request weather forecasts on demand
- View wave height, wind speed and direction, barometric pressure, temperature, for any location

SOS
GLOBAL SEARCH AND RESCUE
- 2-way communication with global SAR
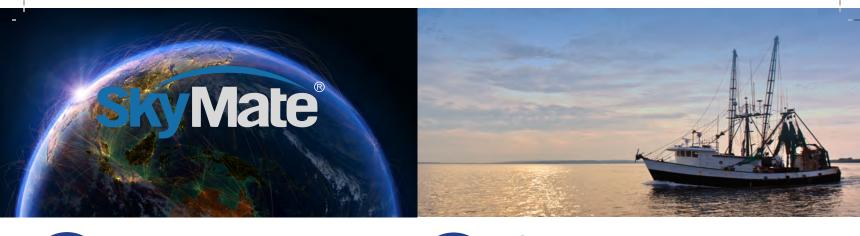- Automatic position updates to SAR

POSITION REPORTING
FLEET TRACKING
- Online map based fleet tracking
- Customize position reporting intervals

REMOTE MONITORING
PEACE OF MIND
- Monitor up to 16 sensors
- Emergency notifications
- Easy to setup customizable rules

SkyMate®

LOW MONTHLY COST
FLEXIBLE AND AFFORDABLE
- SkyMate gives more for less!

USER FRIENDLY
EASY TO INSTALL AND OPERATE
- Works with any device with a browser (e.g. Apple, Android, laptop, PC)
- Also works with SI-TEX Navstar and Raymarine Axiom
- DIY install and quick setup
- Plug-and-play right out of the box

Communications Hub

Smart Antenna

Wi Fi

SI-TEX MARINE ELECTRONICS

Raymarine®

Accessories/Options
- Sentry remote monitoring
- Backup battery
- External siren
- 10m antenna extension cable
- 10m keypad extension cable
- 2m NMEA 2000 cable

SENTRY

KeyPad
- Message Waiting Indicator
- Sentry Monitoring Switch
- Emergency Notification

ENVIRONMENTALS
- Operating: -15°C to 55°C
- Non-Operating: -35°C to 60°C
- IEC 60945, EN 60529, IP67

POWERMANAGMENT
- For operation in both nominal 12V and 24VDC battery systems
- Less than 5W power required (fully configured)
- Reverse wiring polarity protection
- Continuous over-voltage protection

CONFIGURATIONMANAGEMENT
- Firmware updates over satellite and via terminal

SYSTEM FEATURES
- Integrated audio notifications (buzzer)
- Customizable Geo-fencing
- Global Search and Rescue
- NMEA 2000, USB, Wi-Fi, BLE communications capability

CE   CSA®   iridium® connected

COMMUNICATIONS HUB
- 57mm(H) x 133mm(W) x 133mm(L)
- Weight 0.50kg
- Vertical or horizontal mounting bracket provided
- 2m power cable with USB
- Wi-Fi access point
- LED status indicators
- Internal battery for monitoring and emergency operation

SMART ANTENNA
- 94mm(H) x 127mm(W) x 54mm(L)
- Weight 0.72kg
- Surface or pole mounting options
- 10m CAT5 cable (can be extended up to 30m)
- Dual Iridium/GPS antenna

KEYPAD
- 13mm(H) x 102mm(W) x 102mm(L)
- Weight 0.20kg
- Adhesive or bolt mounting options
- 2m cable (can be extended up to 12m)

SkyMate®

SkyMate 11890 Sunrise Valley Dr., Suite 100, Reston, VA 2019
PH: 703-961-5800 | PH: 866-SkyMate | sales@SkyMate.com

www.SkyMate.com